

PRODUCT DATA SHEET
ESD SOFTSHELL JACKET



PRODUCT DATA SHEET

ESD SOFTSHELL JACKET



SPECIFICATION

Code	CE-SOFTSHELL.SFTL
Type	antistatic, ESD
Material	fabric SFTL
Cut	unisex
Sizes	2XS - 2XL
Neck	turtle neck
Sleeves	rib cuff
Bottom	rib welt
ESD sign	side tag

TECHNICAL DATA

Composition	96% polyester, 4% carbon fiber
Structure	300 g/m ²
Weight	in accordance with PN-EN 61340
Resistance	< 0,01
Half Decay time t ₅₀ [s]	S = 0,91 ± 0,05

NORMS

PN-EN 1149-5:2009, PN-EN 61340-5-1:2017,
EN ISO 13688:2013

USAGE

As electronic components become progressively more sensitive to their assembly environments, manufacturers are examining all aspects of production, particularly the hazards of electrostatic discharge (ESD). Reeco ESD garments are manufactured from static dissipative material for use in ESD protected areas. They are lightweight, comfortable and are machine washable. ESD garments should be used in conjunction with a wrist strap and static dissipative footwear for additional grounding. Reeco recommends the use of static dissipative trousers with all ESD garments.

STANDARD COLOURS

37 Black



OPTIONS

Custom sizes	bespoke
Company logo	embroidery / overprint
Custom colours	bespoke

RISK REDUCTION

1. Do not use in flammable atmospheres enriched with oxygen, without the prior approval of the person responsible for security.
2. It does not provide protection against electric shock.

PRODUCT DATA SHEET

ESD SOFTSHELL JACKET



WASHING INSTRUCTION


Washing method	hand washing or washing machine, do not bleach, do not dry clean
Washing temperature	wash at 40° C, gentle process
Drying	no tumble dry
Ironing	max. sole –plate temperature 110° C
Washing cycles	50-60, then we recommend periodic testing

On the effectiveness of antistatic protective clothing may affect the wear, damage, laundry and possible contamination. We recommend washing clothes in controlled conditions.

STORAGE

Antistatic protective clothes need to be storage in dry and airy room. In conditions which protects against dipping, mechanical damage and contamination. We recommend to storage antistatic clothing on shelves or perforated shelves away from hot and light sources. Maximum usage time: 2 years.

TECHNICAL DRAWING

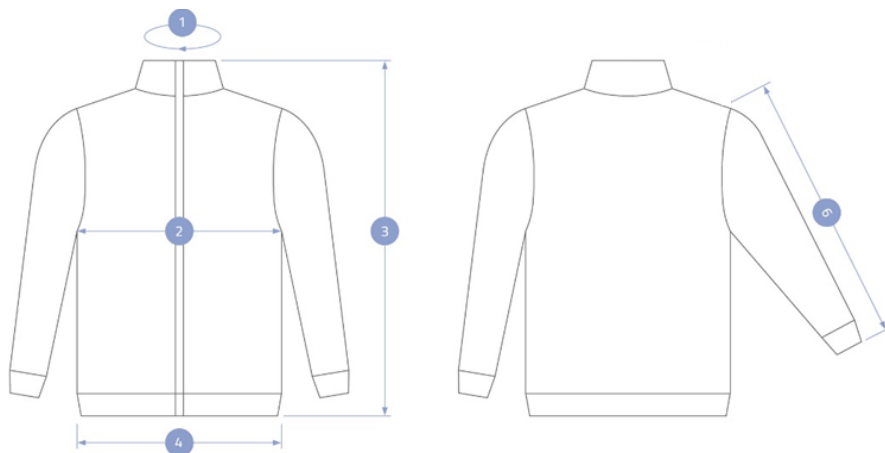

SIZE CHART

	2XS	XS	S	M	L	XL	2XL
BODY							
1	36	40	40	42	43	45	47
2	52	55	56	58	60	62	64
3	70	71	71	72	72	73	73
4	48	49	51	53	55	57	59
SLEEVES							
6	64	65	65	67	68	70	73

Dimensions in cm. Size tolerance +/- 1.5 cm.

Contact: esdclothing@reeco.info

Full offer on WWW.REECO.INFO